

MONARCH

MINI CONVERTIBLE OPEN FIT OTE/BTE

4-Channel 12-Band Digital Amplifier

100% Digital Signal Processing

Features and available options:

- 4-Channel WDRC Compression
- 12-Band Equalizer for Fine Tuning at all Frequencies.
- Up to Four Programmable Memories with Memory Identification Tones.
- Low Battery Warning Tone (Alerts User of Low Battery Level).
- Adaptive Feedback Rejection for Improved Stability and Higher Gains.
- Noise Reduction Reduces Noise when Speech is not present.
- 4 different Standard size tubes and 3 standard size domes available.
- Variable Domes & Custom Molds are available for added performance. (extra charges apply)
- Converts from an Open Fit aid to a BTE aid or a BTE to an Open Fit in a Snap in your Office. Quick and Easy.
- 1 year warranty including Loss & Damage
- Available in Beige.



MONARCH
Mini Convertible
Open Fit OTE




MONARCH
Mini Convertible BTE

	Slim Tube	Ear Hook
Battery Size.....	10A	10A
SSPL90 Max. (dB SPL).....	120	123
HF Average SSPL90 (dB SPL).....	110	117
Peak Gain (dB).....	35	55
HF Average Full On Gain (dB).....	30	50
Frequency Range.....	200-8000Hz	200-8000Hz
Battery Life (Hours).....	95	90

MADE IN THE

U S A

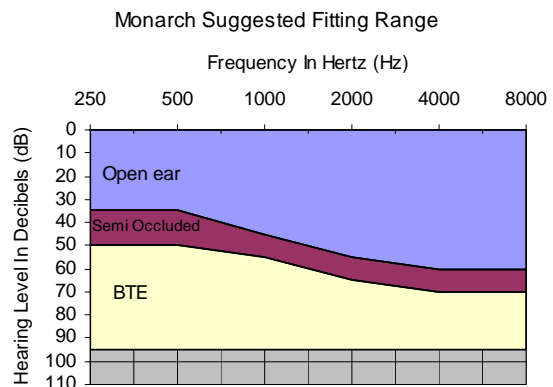

Highest Quality at Lowest Prices